

Docket No.: 50277-456 [OID-1999-048-01]

UTILITY PATENT APPLICATION
UNDER 37 CFR 1.53(b)

Box PATENT APPLICATION
Assistant Commissioner for Patents
Washington, DC 20231
Sir:

Transmitted herewith for filing is the patent application of:

INVENTOR: Rafiul AHAD
FOR: PERSISTENT AGENTS

Enclosed are:

- ☒ 30 pages of cover sheet, specification, claims, abstract.
- ☒ Declaration.
- ☒ Priority Claimed.
- ☐ Certified copy of _____
- ☒ 3 sheets of formal drawing.
- ☒ An assignment of the invention to Oracle Corporation
and the assignment recordation fee.
- ☒ Power of attorney and Revocation of Previous Powers.
- ☐ A verified statement to establish small entity status under 37 CFR 1.9 and 37 CFR 1.27.
- ☐ Information Disclosure Statement, Form PTO-1449 and reference.
- ☒ Return Receipt Postcard
- ☒ Preliminary Amendment

The filing fee has been calculated as shown below:

	NO. OF CLAIMS		EXTRA CLAIMS	RATE	AMOUNT
Total Claims	17	-20	0	\$18.00	\$0.00
Independent Claims	7	-3	4	\$78.00	\$312.00
Multiple Dependent Claim(s)					\$0.00
Basic Fee					\$690.00
Total of Above Calculations					\$1,002.00
Less ½ for Small Entity					\$0.00
Assignment & Recording Fee					\$40.00
Total Fee					\$1,042.00

- ☒ Please charge my Deposit Account No. 150635 in the amount of \$1,042.00. A duplicate copy of this sheet is enclosed.
- ☒ The Commissioner is hereby authorized to charge payment of the following fees associated with this communication or credit any overpayment to Deposit Account No. 150635. A duplicate copy is enclosed.
- ☒ Any additional filing fees required under 37 CFR 1.16.
- ☒ The Commissioner is hereby authorized to charge payment of the following fees during the pendency of this application or credit any overpayment to Deposit Account No. 150635. A duplicate copy of this sheet is enclosed.
- ☒ Any patent application processing fees under 37 CFR 1.17.
- ☒ Any filing fees under 37 CFR 1.16 for presentation of extra claims.

Respectfully submitted,

MCDERMOTT, WILL & EMERY



Stephen C. Carlson
Registration No. 39,929

600 13th Street, N.W.
Washington, DC 20005-3096
(202) 756-8000 SCC:klm
Date: May 25, 2000
Facsimile: (202) 756-8087

005350 2962560

Docket No.: 50277-456 [OID-1999-048-01]

PATENT

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Application of :
:
Rafiul AHAD :
:
Serial No.: : Group Art Unit:
:
Filed: May 25, 2000 : Examiner:
:
For: PERSISTENT AGENTS

PRELIMINARY AMENDMENT

Assistant Commissioner for Patents
Washington, DC 20231

Sir:

Prior to examination of the above-referenced application, please amend the application as follows:

IN THE CLAIMS:


Please change the numbering of the second occurrence of claim 13 from "13" to --14--.

REMARKS

Entry of this preliminary amendment is respectfully requested.

Respectfully submitted,

MCDERMOTT, WILL & EMERY



Stephen C. Carlson
Registration No. 39,929

600 13th Street, N.W.
Washington, DC 20005-3096
(202) 756-8000 SCC:klm
Date: May 25, 2000
Facsimile: (202) 756-8087

005550 296/2560

50277-456 [OID-1999-048-01]

Patent

UNITED STATES PATENT APPLICATION
FOR

PERSISTENT AGENTS

INVENTOR:

RAFIUL AHAD

PREPARED BY:
MCDERMOTT, WILL & EMERY
600 13TH STREET, N.W.
WASHINGTON, DC 20005
(202) 756-8600

005250 2962550

PERSISTENT AGENTS

RELATED APPLICATIONS

The present application claims the benefit of U.S. Provisional Patent Application
5 Serial Number 60/167,676, entitled "Use of Persistent Agents to Seamlessly Store Java
Objects in a Database" filed on November 29, 1999 by Rafiul Ahad (attorney docket
number 50277-319), the contents of which are hereby incorporated by reference.

The present application claims the benefit of U.S. Provisional Patent Application
Serial Number _____, entitled "Persistent Agents" filed on December 17, 1999 by
10 Rafiul Ahad (attorney docket number 50277-404), the contents of which are hereby
incorporated by reference.

FIELD OF THE INVENTION

The present invention relates to computer systems and more particularly to storing
and retrieving persistent objects.

15 BACKGROUND OF THE INVENTION

Typically, most objects created by a process are destroyed when that process
terminates. A persistent object, however, is an object whose lifetime can exceed the
lifetime of the process that creates or accesses the object. Object persistence is therefore
a useful property for those objects instantiated in one process that carry information
20 needed by other processes. For example, it may be desirable for one Java application to
access the objects previously created by another Java application.

A first approach for implementing object persistence is to serialize the entire
object into a structured sequence of bytes and store the serialized object into a file, a
database, or other persistent object store. When the serialized object is needed by another

process, the serialized object is deserialized back into a run-time object and used by that other process.

One drawback to this first approach is that it does not efficiently support the selective retrieval of persistent objects from the persistent object store. For example, a persistent object store may contain a plurality of employee objects, each identified by a name, social security number, and a position title. If an application wishes to retrieve all the software engineers from the persistent object store in accordance with this first approach, each employee object would have to be deserialized back into a run-time object so that the object's position title field can be inspected to determine if the position title for the object is actually a software engineer. As a result, many objects are deserialized, which is an expensive operation, whether or not the objects are actually wanted.

Accordingly, a second approach has been developed to store persistent objects as rows in a database table, in which the columns of the database table correspond to fields of the persistent object. Since the fields of persistent object are stored in separate columns of the database table, these columns can be indexed and accessed by a database server so that the identifying which persistent objects satisfy a particular condition can be efficiently performed, *e.g.* by a B-Tree lookup. In the example, the persistent employee objects would be stored as rows in an employee table having one column for the name of the employee, another column for the social security number, and a third column for the position title. Thus, retrieving all the software engineers from among the persistent employee objects can be quickly performed simply by executing a "select" statement in the Structured Query Language (SQL) that uses an index built on the position title column. Consequently, the second approach promises to exploit the high-performance data storage and retrieval technology of modern database systems.

A major source of difficulty with conventional implementations of the second approach is due to an "impedance mismatch" in creating a direct object-relational mapping between the programming model and the database model. The programming

model support a rich set of features for objects; for example, the programming model typically supports inheritance, polymorphism, multi-valued attributes, which are not easily handled in the database model. On the other hand, the database model employs concepts such as transaction semantics (commit, rollback), primary keys, foreign keys, uniqueness constraints, and other concepts that lack an immediate analog in the programming model. Therefore, the implementation of such a direct object-relational mapping involves much overhead.

Furthermore, the direct object-relational mapping is statically implemented for each class of object that may be persistent, adding persistence to the class interface.

Thus, the overhead for implementing persistence in each class is incurred again and again for each new class. In addition, the direct object-relation mapping is fixed at compile-time, so that any changes made to the class must be reflected in re-coding the implementation of persistence for the class.

Attempts have been made to provide the implementation of persistence in a “persistent object” base class. Thus, the programmer designing the classes for persistent objects must derive these class from the persistent object base class. In single-inheritance languages such as Java, however, this attempt compels the programmer to derive almost every class from the persistent object base class, which adds persistence to the interface of all of such classes, even if unneeded for particular classes, just to permit the use of polymorphism. Another attempt to reduce the programming overhead is by special pre-processing or post-processing of non-persistent classes to make the instances of the classes persistent. However, such pre-processing and post-processing greatly complicates the maintenance of the software and creates further opportunities for error when the pre-processing and post-processing are not consistently applied.

Therefore, there is a need for reducing the overhead and difficulties associated implementing persistence for objects of many different classes whose fields are to be

stored in corresponding columns of a database, and whose structure may change over time (schema evolution).

SUMMARY OF THE INVENTION

These and other needs are addressed by the present invention by separating persistence from modeling by providing “persistent agents.” The present invention stems from the realization that persistence is orthogonal to modeling, in the sense that the choice of making objects of a class persistent should be independent of the design of the class’s interface or implementation. In other words, when designing classes for an application, the programmer need not take persistence into account. Thus, the programmer should not be required to code the direct object-relation mapping in the programmer’s new classes, inherit the new classes from a persistence-capable interface, pre-process or post-process the new classes to make the instances of the new classes persist beyond the lifetime of the process that creates the instances.

Orthogonality of persistence is provided by creating a “persistent agent” for every class whose instances need to persist. A persistent agent is an object that maps the constructs of a programming language to a database model. The persistent agent permits database concepts such as primary keys and foreign keys to augment the programming constructs. A persistent agent is a dynamic map in a sense that if changes are made to a programming construct (such as adding a new field), then those changes could be incorporated into the corresponding database structure simply by calling appropriate methods in the persistent agent.

In one embodiment, a persistent agent is instance of a class that implements a “persistent agent” interface of an application programming interface (API) for applications to store and retrieve objects persistently. A persistent agent for a class may be simply created by invoking a method in another interface of the API with the fully-qualified name of the class, and provides a way to store and retrieve objects of that class to and from a persistent object store. Database concepts such as primary keys and other constraints can be specified by invoking methods of the persistent agent. In addition,

optimization hints such as specifying which fields of the object will be updated are also specified using the persistent agent.

Accordingly, one aspect of the invention involves a computer-implemented method and a computer-readable medium bearing instructions for persistently storing an object belonging to a class, by creating a persistent agent based on a class and storing the object in a persistent object store based on the persistent agent. The persistent agent provides an interface for persistently storing the object in the persistent object store.

Another aspect of the invention pertains to a computer-implemented method and a computer-readable medium bearing instructions for retrieving a set of objects from a persistent object store, by: creating a persistent agent based on a class and retrieving the set of objects in the persistent object store based on the persistent agent. The persistent agent provides an interface for retrieving a set of objects from the persistent object store.

Yet another aspect of the invention is an application programming interface (API) for persistent object storage that includes routines for: instantiating the persistent agent based on the class of an object; storing the object in a persistent object store; and retrieving a set of objects from the persistent object store based on a predicate.

Still other objects and advantages of the present invention will become readily apparent from the following detailed description, simply by way of illustration of the best mode contemplated of carrying out the invention. As will be realized, the invention is capable of other and different embodiments, and its several details are capable of modifications in various obvious respects, all without departing from the invention. Accordingly, the drawing and description are to be regarded as illustrative in nature, and not as restrictive.

BRIEF DESCRIPTION OF THE DRAWINGS

The present invention is illustrated by way of example, and not by way of limitation, in the figures of the accompanying drawings and in which like reference numerals refer to similar elements and in which:

5 FIG. 1 depicts a computer system that can be used to implement an embodiment of the present invention.

FIG. 2 is a flowchart illustrating the operation of one example of persistently storing an object in accordance with an embodiment of the present invention.

10 FIG. 3 is a flowchart illustrating the operation of one example of retrieving persistent objects in accordance with an embodiment of the present invention.

DESCRIPTION OF THE PREFERRED EMBODIMENT

A system, method, and software for object persistence are described. In the following description, for the purposes of explanation, numerous specific details are set forth in order to provide a thorough understanding of the present invention. It will be
5 apparent, however, to one skilled in the art that the present invention may be practiced without these specific details. In other instances, well-known structures and devices are shown in block diagram form in order to avoid unnecessarily obscuring the present invention.

In a database management system, data is stored in one or more data containers,
10 each container contains records, and the data within each record is organized into one or more fields. In relational database systems, the data containers are referred to as tables, the records are referred to as rows, and the fields are referred to as columns. In object oriented databases, the data containers are referred to as object classes, the records are referred to as objects, and the fields are referred to as attributes. Other database
15 architectures may use other terminology.

Systems that implement the present invention are not limited to any particular type of data container or database architecture. However, for the purpose of explanation, the terminology and examples used herein shall be that typically associated with relational databases. Thus, the terms “table,” “row,” and “column” shall be used herein
20 to refer respectively to the data container, record, and field.

HARDWARE OVERVIEW

FIG. 1 is a block diagram that illustrates a computer system 100 upon which an embodiment of the invention may be implemented. Computer system 100 includes a bus 102 or other communication mechanism for communicating information, and a processor
25 104 coupled with bus 102 for processing information. Computer system 100 also includes a main memory 106, such as a random access memory (RAM) or other dynamic

storage device, coupled to bus 102 for storing information and instructions to be executed by processor 104. Main memory 106 also may be used for storing temporary variables or other intermediate information during execution of instructions to be executed by processor 104. Computer system 100 further includes a read only memory (ROM) 108 or other static storage device coupled to bus 102 for storing static information and instructions for processor 104. A storage device 110, such as a magnetic disk or optical disk, is provided and coupled to bus 102 for storing information and instructions.

Computer system 100 may be coupled via bus 102 to a display 112, such as a cathode ray tube (CRT), for displaying information to a computer user. An input device 114, including alphanumeric and other keys, is coupled to bus 102 for communicating information and command selections to processor 104. Another type of user input device is cursor control 116, such as a mouse, a trackball, or cursor direction keys for communicating direction information and command selections to processor 104 and for controlling cursor movement on display 112. This input device typically has two degrees of freedom in two axes, a first axis (e.g., x) and a second axis (e.g., y), that allows the device to specify positions in a plane.

The invention is related to the use of computer system 100 for storing and retrieving persistent objects. According to one embodiment of the invention, storing and retrieving persistent objects is provided by computer system 100 in response to processor 104 executing one or more sequences of one or more instructions contained in main memory 106. Such instructions may be read into main memory 106 from another computer-readable medium, such as storage device 110. Execution of the sequences of instructions contained in main memory 106 causes processor 104 to perform the process steps described herein. One or more processors in a multi-processing arrangement may also be employed to execute the sequences of instructions contained in main memory 106. In alternative embodiments, hard-wired circuitry may be used in place of or in combination with software instructions to implement the invention. Thus, embodiments

of the invention are not limited to any specific combination of hardware circuitry and software.

The term “computer-readable medium” as used herein refers to any medium that participates in providing instructions to processor 104 for execution. Such a medium may take many forms, including but not limited to, non-volatile media, volatile media, and transmission media. Non-volatile media include, for example, optical or magnetic disks, such as storage device 110. Volatile media include dynamic memory, such as main memory 106. Transmission media include coaxial cables, copper wire and fiber optics, including the wires that comprise bus 102. Transmission media can also take the form of acoustic or light waves, such as those generated during radio frequency (RF) and infrared (IR) data communications. Common forms of computer-readable media include, for example, a floppy disk, a flexible disk, hard disk, magnetic tape, any other magnetic medium, a CD-ROM, DVD, any other optical medium, punch cards, paper tape, any other physical medium with patterns of holes, a RAM, a PROM, and EPROM, a FLASH-EPROM, any other memory chip or cartridge, a carrier wave as described hereinafter, or any other medium from which a computer can read.

Various forms of computer readable media may be involved in carrying one or more sequences of one or more instructions to processor 104 for execution. For example, the instructions may initially be borne on a magnetic disk of a remote computer. The remote computer can load the instructions into its dynamic memory and send the instructions over a telephone line using a modem. A modem local to computer system 100 can receive the data on the telephone line and use an infrared transmitter to convert the data to an infrared signal. An infrared detector coupled to bus 102 can receive the data carried in the infrared signal and place the data on bus 102. Bus 102 carries the data to main memory 106, from which processor 104 retrieves and executes the instructions. The instructions received by main memory 106 may optionally be stored on storage device 110 either before or after execution by processor 104.

Computer system 100 also includes a communication interface 118 coupled to bus 102. Communication interface 118 provides a two-way data communication coupling to a network link 120 that is connected to a local network 122. For example, communication interface 118 may be an integrated services digital network (ISDN) card or a modem to provide a data communication connection to a corresponding type of telephone line. As another example, communication interface 118 may be a local area network (LAN) card to provide a data communication connection to a compatible LAN. Wireless links may also be implemented. In any such implementation, communication interface 118 sends and receives electrical, electromagnetic or optical signals that carry digital data streams representing various types of information.

Network link 120 typically provides data communication through one or more networks to other data devices. For example, network link 120 may provide a connection through local network 122 to a host computer 124 or to data equipment operated by an Internet Service Provider (ISP) 126. ISP 126 in turn provides data communication services through the worldwide packet data communication network, now commonly referred to as the "Internet" 128. Local network 122 and Internet 128 both use electrical, electromagnetic or optical signals that carry digital data streams. The signals through the various networks and the signals on network link 120 and through communication interface 118, which carry the digital data to and from computer system 100, are exemplary forms of carrier waves transporting the information.

Computer system 100 can send messages and receive data, including program code, through the network(s), network link 120, and communication interface 118. In the Internet example, a server 130 might transmit a requested code for an application program through Internet 128, ISP 126, local network 122 and communication interface 118. In accordance with the invention, one such downloaded application provides for storing and retrieving persistent objects as described herein. The received code may be executed by processor 104 as it is received, and/or stored in storage device 110, or other

non-volatile storage for later execution. In this manner, computer system 100 may obtain application code in the form of a carrier wave.

A PERSISTENT OBJECT MODEL

In accordance with one embodiment of the present invention, the following
5 persistent object model is adopted within a Java programming language environment. Although the following description refers to the Java programming language environment, it is to be understood that the concepts of the present invention are not necessarily limited to the Java programming language environment, but, on the contrary, may be applied in other object-orient programming language environments as well.

10 Under such a persistent object model, any object can be stored persistently in a persistent object store. A persistent object store is a computer-readable medium providing a long-term storage, such as a file system or database, capable of storing objects beyond the lifetime of any process that created or accessed the objects. In some implementations, the persistent object store can be chosen to provide data
15 synchronization for a mobile user using a laptop, such as by storing persistent objects in updateable snapshots that are replicated to a host database system when the mobile user dials up the host database system. Updateable snapshots are described in more detail in a mobile user environment in the co-pending, commonly assigned U.S. Patent Application Serial No. 09/322,152 entitled "Data Replication for Front Office Automation" filed on
20 May 28, 1999 by Souder et al., whose contents are incorporated by reference in their entirety.

For appropriate implementations of the persistent object store, especially for databases, all operations against a persistent object store are done within a "session," which represents a connection to the persistent object store and provides appropriate
25 transaction semantics (*e.g.* commit and rollback) for those operations. In one example, a session is created by calling a "connect" method of the persistent object store interface

and is thus represented by a Java object that implements a “persistent object store session” (POSSession) interface.

Before an object can be stored in a persistent object store, a persistent agent is created in the persistent object store for the class the object belongs to. In one example, this may be done by calling a “create persistent agent” method of a session and supplying the method with the fully-qualified class name of the class as one of the arguments. As explained hereinafter, desired database constraints can also be supplied to the “create persistent agent” method.

A persistent agent serves to efficiently represent a particular class for the purpose of providing persistence of the instances of the class. Thus, method are defined for the persistent agent to store, retrieve, and update objects, as well as to query meta-information such as fields and the field types defined for the class. In accordance with the database model, all updates performed on an object stored or retrieved by the persistent agent can be committed or rolled back as part of the session in which the object is created.

A persistent agent stores the state of objects belonging to the class for which the persistent agent was instantiated in the persistent object store by mapping the field values of the objects to appropriate portions of a database object, such as a table. For example, the persistent agent may create a table to hold persistently stored objects in rows and store the non-array fields of the object in corresponding columns. The elements of an array field of the object can be stored, for example, either entirely within a column of the table or in rows of another table allocated to hold objects of the array.

In one implementation, the fields of the Java object can be identified based on the fully-qualified Java class name by using the Java Reflection API. Thus, the values of the various fields are read from the object using the Java Reflection API and stored in the persistent object store, for example, by appropriate SQL commands. If any of the fields refer to an object of a Java reference type that is not user-defined (e.g. String or int),

the persistent agent makes a copy of that object and stores it in the persistent object store. If any of the fields refers to an object of a user-defined class, on the other hand, an already instantiated persistent agent for that user-defined class may be used to retrieve the reference to the object which is then stored in the persistent object store. However, if

5 there is no such persistent agent instantiated for the user-defined class, a default persistent agent for the user-defined class can be automatically created with default properties or simply ignored. This behavior can be specified by setting a property for the persistent agent.

Various options and optimization hints can be specified in the persistent agent

10 corresponding to a class for retrieving persistent objects belonging to the class. For example, these options could include specifying which fields are be retrieved, which fields the application intends to update, whether to retrieve references to other objects, and whether to materialize referenced objects.

AN EXEMPLARY OBJECT PERSISTENCE API

15 In accordance with one embodiment of the present invention, the following API is employed for providing object persistence, including a PersistentObjectStore interface, a POSSession interface, and a PersistentAgent interface.

TABLE 1 illustrates a PersistentObjectStore interface for modeling a persistent object store that stores objects persistently, which, as explained herein above,

20 can be a relational database, a file system, updateable snapshots, and the like.

[TABLE 1]

```
public interface PersistentObjectStore {
    public POSSession connect(Properties connParameter)
    throws POSException;
    public POSSession connect(String user, String
    password) throws POSException;
    public String getVersion();
    public Properties getProperty();
}
```

The `connect()` methods allow the programmer to create a session with a persistent object store, either by supplying a name and password for a particular user or in an implementation-defined manner with the `connParameter` argument. A

`getVersion()` method returns the version of the persistent object store, and a

- 5 `getProperty()` method returns implementation-defined properties of the persistent object store.

Once the programmer has connected to a persistent object store and has thereby created a session, the programmer can use the session to create persistent agents and manage the transaction semantics for the persistent object store. TABLE 2 illustrates a

- 10 `POSSession` interface for modeling a connection to a persistent object store, with support for the atomicity of operations being performed against persistent object during a session.

[TABLE 2]

```
public interface POSSession {
    public PersistentAgent createPersistentAgent(String
javaClassRef, Properties props) throws POException;
    public PersistentAgent findPersistentAgent(String
javaClassRef) throws POException;
    public void dropPersistentAgent(PersistAgent p)
throws POException;
    public String[] getPersistentJavaClasses();

    public static final String ISOL_DIRTY_READ =
"DirtyRead";
    public static final String ISOL_READ_COMMITTED =
"ReadCommitted";
    public static final String ISOL_REPEATABLE_READ =
"RepeatableRead";
    public static final String ISOL_SERIALIZABLE =
"Serializable";
    public void beginTransaction(String isolationLevel);
    public void commit();
    public void rollback();
}
```

Invoking a `createPersistentAgent()` method creates the necessary data

- 15 structures in the persistent object store, such as tables in a database, and returns an

instantiated persistent agent for a given Java class. The `javaClassRef` parameter is a fully-qualified name of the class, so that the Java Reflection API can be used to identify and access the fields of instances of the class. The `props` parameter is for specifying the properties of the persistent agent. For example, the following properties may be

5 supported:

- `PrimaryKey`, whose value is a space-separated list of field names that constitute the primary key to be used by the persistent agent in storing and retrieving the persistent object from the persistent object store. A class need not have a primary key, and a primary key values must be unique and non-null.
 - `NonNullFields`, whose value is a space-separated list of field names for fields whose values are not allowed to be null.
 - `NoAgentAction`, whose possible values are `POSSession.CREATE` or `POSSession.NULLIFY` to specify the action taken by the persistent agent
- 10 when storing fields of the current class object that happen to lack a corresponding, instantiated persistent agent. The `POSSession.CREATE` value means that a default persistent agent is created for such a field is instantiated and used to store the contents of the field, thereby making a closure of the persistent object. On the other hand, the
- 15 `POSSession.NULLIFY` values means that the field should be ignored, for example, by setting the field to null.
- 20

Preferably, the data structure in the persistent object store created by invoking the `createPersistentAgent()` method has portions that correspond to respective fields of objects that belong to the class for which the persistent agent was just created.

25 For example, a table can be created to hold persistently stored objects in rows would store non-array fields of the object in corresponding columns of the table. The elements of an

array field of the object can be stored, for example, either entirely within a column of the table or in rows of another table allocated to hold objects of the array.

A `findPersistentAgent()` method allows for a previously instantiated persistent agent to be returned for a class, if it exists. A `dropPersistentAgent()`

- 5 method allows for the persistent agent to be destroyed. Finally, invoking a `getPersistentJavaClasses()` method returns a list of those classes for which a persistent agent has been instantiated.

The `POSSession` interface provides for transaction semantics that are appropriate for using a database as the persistent object store. For example, a

- 10 `beginTransaction()` method allows the programmer to start a transaction in the session with one of four isolation levels: “DirtyRead”, “ReadCommitted”, “RepeatableRead”, and “Serializable”. In addition, invoking the `commit()` method causes all changes made to the persistent object store for this session to be made permanent, and invoking the `rollback()` method causes changes since the beginning
- 15 of a transaction or since the last commit.

Once the programmer has instantiated a persistent agent for a particular class, the programmer can use the persistent agent to persistently store and retrieve objects belong to that class, as well as, specify optimization hints for handling the persistent objects in the persistent object store. TABLE 3 illustrates a `PersistentAgent` interface for

- 20 modeling a persistent agent, which has been created for a particular class.

[TABLE 3]

```
public interface PersistentAgent {
    public void store(Object obj) throws POSException;
    public Object[] retrieve(String predicate) throws
    POSException;
    public void delete(Object obj) throws POSException;

    public final short DONT_RETRIEVE           = 0;
    public final short RETRIEVE                 = 1;
    public final short CREATE_REFERENCED_OBJECT = 3;
    public final short WILL_BE_UPDATED         = 4;
```

```

    public final short CREATE_REFERENCED_WILL_BE_UPDATED
= 7;
    public final short UNIQUE_INDEX          = 5;
    public final short NON_UNIQUE_INDEX      = 6;

    public String[] getPrimaryKeyFields();
    public boolean fieldCanBeNull(String fieldName);

    public void createIndex(String indexName, String[]
fieldNames, short indexKind) throws POSException;
    public void dropIndex(String indexName) throws
POSException;
    public String[] getIndexes();
    public String[] getIndexFields(String indexName)
throws POSException;
    public short getIndexKind(String indexName) throws
POSException;

    public String[] getFields();
    public String getType(String fieldName) throws
POSException;
    public short getFieldAccessMode(String fieldName)
throws POSException;
    public void setFieldAccessMode(String fieldName,
short mode) throws POSException;
}

```

The PersistentAgent interface provides the basic functionality for storing and retrieving objects from the persistent object store. For example, invoking a `store()` method causes the object indicated by the `obj` parameter to be stored in the persistent object store. Exceptions could be raised if any of the fields in the primary field is null, if the primary key already exists, or if there is already another persistent object in the class with the same value in a field that has a unique index for the field. In one implementation, when an object is stored in the persistent object store, the fields of the object are mapped to corresponding portions of the data structures in the persistent object store, such as to corresponding columns of a database table. In addition, the identity of this object is saved in an ancillary set-like data structure such as a hash table to keep track of which objects are part of the persistent object store.

As another example, invoking a `retrieve()` method causes zero or more objects to be returned in an `Object []` array that satisfies a given predicate, which is indicated by the predicate parameter. Preferably, the `retrieve()` method should support relative comparisons of field names with constants and Boolean operators, such as the following predicate: “name = \"Smith\" and age > 40” where name and age are fields whose types are primitives. Exceptions may be raised if the predicate is malformed, if the field does not exist, or if the field type is not supported (e.g. for user-defined types). In one implementation, when objects are retrieved from the persistent object store, the predicate is converted into a SQL statement with the predicate in a WHERE clause to obtain a list of rows, whose columns are then mapped into fields of respective objects. To avoid the so-called shared object problem, in which different instances are created for the same persistent object, the persistent agent can maintain a hash table or other set-like data structure to check if the object corresponding to the row was already instantiated. If the object was already instantiated, then that instantiated object is used; otherwise the object is instantiated and its fields are populated with values from the corresponding portions of the table or tables.

A `delete()` method is provided for deleting objects from the persistent object store.

Relational database properties and optimization hints can be provided and queried through other methods of the `PersistentAgent` interface. For example, invoking a `getPrimaryKeyFields()` method returns a space-separated list of the fields in the object that constitute a primary key. A primary key is a set of columns that are unique and non-null, which can serve to uniquely identify each row in the table. Those fields of the object that constitute the primary key are specified when the persistent agent is created. In addition, a `fieldCanBeNull()` method can be used for querying whether a field is allowed to be null. The fields that cannot be null were previously specified in a space-separated list when the persistent agent was created.

Indexes, which enable faster retrieval times, can be built on particular fields with a `createIndex()` method, which takes as parameters the name of the index to be created (`indexName`), the space-separated names of the fields upon which the index is built (`fieldNames`), and whether a uniqueness constraint is imposed on the fields (5 `indexKind`), which would raise an exception if a non-unique field values were stored in the persistent object store. Administrative methods for managing indexes may also be provided, such as a `dropIndex()` method for deleting indexes, a `getIndexes()` method for returning an array of all the indexes defined for the persistent agent, a `getIndexFields()` method for returning the fields upon which a specified index is 10 built, and a `getIndexKind()` method for indicating whether the index imposes a uniqueness constraint.

In addition, a `getFields()` method is provided to returning the names of the fields defined on the persistent agent and thus the corresponding object. In a Java implementation of this interface, all declared and inherited, private, protected, package, 15 and public fields must be returned that are not declared to be transient and that are not inherited from classes in the `Java.lang` package. Finally, a `getType()` method is supplied for providing the fully-qualified name of the type or class of a particular field.

The `getFieldAccessMode()` and `setFieldAccessMode()` methods are provided for manipulating the access mode of a given field. The access mode can be one 20 of the following: `DONT_RETRIEVE`, which indicates that the `retrieve()` method should not retrieve this field; `RETRIEVE`, which indicates that the `retrieve()` method should retrieve this field; `CREATE_REFERENCE_OBJECT`, which indicates that if the field references a user-defined type, then the `retrieve()` method should create an instance of the referenced type and set the field to that object reference (otherwise, the 25 `retrieve()` method would set the field to null); `WILL_BE_UPDATED`, which indicates that the field will be updated (in some implementations, updates to such fields are the only ones that applied to the persistent object store for performance reasons); and

CREATE_REFERENCE_WILL_BE_UPDATED, which indicates a combination of the above two cases.

STORING PERSISTENT OBJECTS

FIG. 2 is a flowchart illustrating the operation of one example of persistently storing an object in accordance with an embodiment of the present invention. At step 200, a session is created by connecting to a persistent object store. This step can be performed by calling the `connect()` method of the persistent object store interface with appropriate parameters, such as the name and password. For example, one can connect to an OracleLite™ database as `PersistentObjectStore pos` putting the result in a `sess` variable with the following code fragment:

```
POSSession sess = pos.connect(null);
```

At step 202, a persistent agent is found or instantiated corresponding to the class the object belongs to. For example, if the object belongs to a class `POSDData` {
String Date; String Time; int channel; int duration; }, then the method invocation to instantiate the persistent agent can be done with the following code fragment:

```
PersistentAgent pa =  
    sess.createPersistentAgent("POSDData", null);
```

In response, the fields of the `POSDData` class are inspected to create a corresponding table (termed, for example, `POSDData`) in the OracleLite™ database having four columns: date, time, channel, and duration. Since the Date and Time fields of the class are strings, the corresponding date and time columns are varchars, and the channel and duration int fields correspond to number columns. If `POSDData` class were to include a user-defined type, then a persistent agent corresponding to that user-defined would also be instantiated if specified. Also, if the `POSDData` class were to include a system type that does not easily correspond to a database type (such as a property), then

the persistent agent would treat that type as a user-defined type but employ a vendor-provided persistent agent for that system type. Since the `prop` parameter was `null` in this example, no fields of the `POSDData` table constitute a primary key nor cannot be `null`. Alternatively, the `findPersistentAgent()` method can be invoked to find a persistent agent if the persistent agent already exists.

At step 204, the `store()` method of the persistent agent is invoked to store an object belonging to the class the persistent agent was created for in the persistent object store. In this example, the following code fragment could be used for a `POSDATA` object `pd`, where `pa` is the persistent agent:

```
pa.store(pd);
```

In response to this method invocation, as set forth as step 206, the persistent agent maps the fields of the object to the corresponding columns of the database table and stores the values of the fields in the corresponding columns. In addition, the persistent agent updates an internal data structure such as a hash table or other set-like data structure to keep track of which objects are now part of the persistent object store. In this example, the `pd` object is recorded in the hash table.

At step 208, changes to objects controlled by the persistent agent are committed to the persistent object store, including changes made to retrieved objects of field that have been specified to be `WILL_BE_UPDATED`. If the persistent object store is a relational database, for example, these changes may be committed by a `commit` statement. For less sophisticated data stores, as another example, the objects are kept in virtual memory and are only written to disk when the `commit` takes place. The following code fragment could be used to cause performance of this step:

```
sess.commit();
```

RETRIEVING PERSISTENT OBJECTS

FIG. 3 is a flowchart illustrating the operation of one example of retrieving persistent objects in accordance with an embodiment of the present invention. At step 300, a session is created by connecting to a persistent object store. This step can be performed by calling the `connect()` method of the persistent object store interface with appropriate parameters, such as the name and password. For example, one can connect to an OracleLite™ database as `PersistentObjectStore pos` variable putting the result in a `sess` variable with the following code fragment:

```
10      POSSession sess = pos.connect(null);
```

At step 302, a persistent agent is found that corresponds to the class the object belongs to. For example, if the object belongs to a class `POSData { String Date; String Time; int channel; int duration; }`, then the method invocation to instantiate the persistent agent can be done with the following code

```
15      fragment:
```

```
      PersistentAgent pa =
          sess.findPersistentAgent("POSData", null);
```

At step 304, the `retrieve()` method is invoked to retrieve a set of objects belong to the class to which the persistent agent corresponds, as long as the objects satisfies the predicate. For example, to retrieve all objects of `POSData` type that have a channel of 23 in an array called `results`, the following code fragment may be used:

```
      Object[] results = pa.retrieve("channel = 23");
```

In response to this method invocation, as set forth as step 306, the persistent agent formulates an appropriate query on the persistent object store based on the predicate to retrieve entries from the data structure in the persistent object store that satisfy the predicate. In the present example involving a relational OracleLite database, the following SQL query might be generated, in which the `WHERE` clause contains the

```
30      predicate:
```

```
select * from POSData where channel = 23;
```

At step 308, the rows are converted into objects, by mapping the columns of the table to the corresponding fields of the object and storing the values of the columns in the corresponding fields. In addition, the persistent agent updates the internal data structure (such as a hash table or other set-like data structure) to keep track of which objects are now in the program memory.

CONCLUSION

Accordingly, a system, method, and software for implementing object persistence with persistent agents has been described, in which the implementation of object persistence is decoupled from modeling the class. Consequently, the programmer is freed from having to worry about persistence or cluttering the interface of the objects when designing an application, because the persistent agent encapsulates all the necessary functionality.

Furthermore, the encapsulation provided by the persistent agent allows for object persistent to implemented in new environments such as that for mobile users who are only sporadically connected to the database. In this example, the persistent agent can be implemented to use updateable snapshots as the persistent object store, without affecting the design of the class that actually model the application's behavior. In addition, a straightforward facility for allowing optimization hints, such as primary keys, uniqueness constraints, and indexes can be attained.

While this invention has been described in connection with what is presently considered to be the most practical and preferred embodiment, it is to be understood that the invention is not limited to the disclosed embodiment, but on the contrary, is intended to cover various modifications and equivalent arrangements included within the spirit and scope of the appended claims.

CLAIMS

WHAT IS CLAIMED IS:

1 1. A method for persistently storing an object belonging to a class, comprising the
2 computer-implemented steps of:

3 creating a persistent agent based on a class, said persistent agent providing an
4 interface for persistently storing the object in a persistent object store; and
5 storing the object in the persistent object store based on the persistent agent.

1 2. The method according to claim 1, further comprising the step of modifying the
2 object in the persistent object store based on the persistent agent.

1 3. The method according to claim 1, wherein the step of creating the persistent agent
2 based on the class includes the step of instantiating the persistent agent based on a fully
3 qualified name for a Java class.

1 4. The method according to claim 1, wherein:
2 the persistent object store includes a relational database;
3 and the step of storing the object in the persistent object store includes the step of
4 storing the object in at least one database table corresponding to the class.

1 5. The method according to claim 4, wherein the step of creating the persistent agent
2 based on the class includes the steps of:
3 determining if the at least one database table corresponding to the class has been
4 created; and

if the at least one database table is determined not to have been created, then creating
the at least one database table.

6. The method according to claim 5, wherein step of storing the object in at least one
database table includes the steps of:

storing values of at least some of the fields in corresponding columns of the database
table;

7. The method according to claim 6, further comprising the step of designating at
least some of the columns as primary key columns based a list of corresponding field
names of the object.

8. The method according to claim 6, further comprising the step of building an index
on at least some of the columns based a list of corresponding field names of the object.

9. The method according to claim 1, wherein the object contains another object
belonging to another class, said method further comprising the steps of:
creating another persistent agent based on the other class; and
storing the other object in the persistent object store based on the other persistent
agent.

10. The method according to claim 1, further comprising the step of establishing a
session with the persistent object store;
wherein the step of creating the persistent agent includes the step of creating the
persistent agent based on the session.

1 11. A method of retrieving a set of objects from a persistent object store, comprising
2 the steps of:
3 creating a persistent agent based on a class, said persistent agent providing an
4 interface for retrieving a set of objects from the persistent object store; and
5 retrieving the set of objects in the persistent object store based on the persistent agent.

1 12. The method according to claim 11, wherein the step of retrieving the set of
2 objects includes the step of retrieving the set of objects in the persistent object store based
3 further on a predicate.

1 13. A method for persistently storing an object belonging to a class, comprising the
2 computer-implemented steps of:
3 creating an agent, said persistent agent providing an interface for persistently storing
4 the object in a persistent object store; and
5 storing the object in the persistent object store using the agent.

1 14. A computer-readable medium bearing instructions for implementing an
2 application programming interface (API) of a persistent agent for persistent storing an
3 object belong to a class, said instructions arranged to implement routines for performing
4 the steps of:
5 instantiating the persistent agent based on the class;
6 storing the object in a persistent object store; and
7 retrieving a set of objects from the persistent object store based on a predicate.

1 15. A computer-readable medium bearing instructions for persistently storing an
2 object belonging to a class, said instructions being arranged to cause one or more
3 processors upon execution thereof to perform the steps of:

creating a persistent agent based on a class, said persistent agent providing an interface for persistently storing the object in a persistent object store; and storing the object in the persistent object store based on the persistent agent.

16. A computer-readable medium bearing instructions for retrieving a set of objects from a persistent object store, said instructions being arranged to cause one or more processors upon execution thereof to perform the steps of:

creating a persistent agent based on a class, said persistent agent providing an interface for retrieving a set of objects from the persistent object store; and retrieving the set of objects in the persistent object store based on the persistent agent.

17. A computer-readable medium bearing instructions for persistently storing an object belonging to a class, comprising the computer-implemented steps of:

creating a persistent agent based on a class, said persistent agent providing an interface for persistently storing the object in a persistent object store; and storing the object in the persistent object store based on the persistent agent.

PERSISTENT AGENTS

ABSTRACT OF THE DISCLOSURE

Object persistence is facilitated by introducing persistent agents to act as bridges
5 between the programming model and the database model. Persistent agents are
instantiated on a per-class basis and are responsible for mapping their class to a suitable
database related. Methods are defined for the persistent agent to specify database-
specific properties and optimization hints.

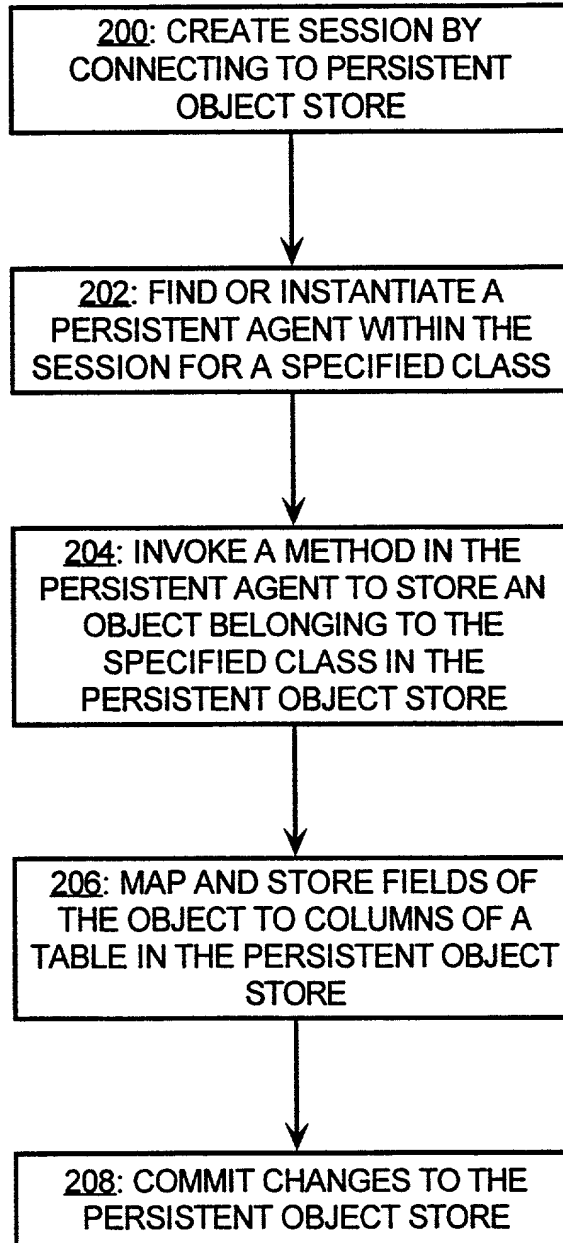


FIG. 2

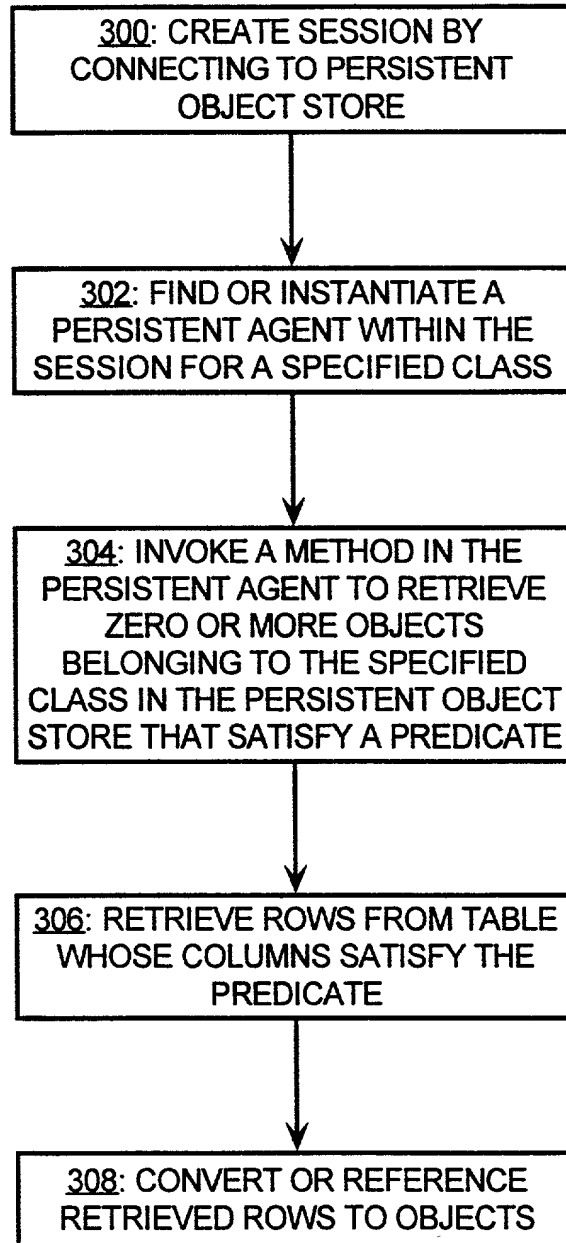


FIG. 3

DECLARATION FOR PATENT APPLICATION

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below, next to my name.

I believe I am the original, first, and sole inventor (if only one name is listed below) or an original, first, and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

PERSISTENT AGENTS

the specification of which

 X is attached hereto.
 was filed on _____ as
United States Application Number _____,
or PCT International Application Number _____,
and was amended on _____
(if applicable)

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims(s), as amended by any amendment referred to above.

I acknowledge the duty to disclose all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56 (copy attached).

I hereby claim foreign priority benefits under Title 35, United States Code, Section 119(a)-(d), on any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

<u>Prior Foreign Application(s)</u>			<u>Priority Claimed</u>	
_____ (Number)	_____ (Country)	_____ (Day/Month/Year Filed)	<u> Yes </u>	<u> No </u>
_____ (Number)	_____ (Country)	_____ (Day/Month/Year Filed)	<u> Yes </u>	<u> No </u>
_____ (Number)	_____ (Country)	_____ (Day/Month/Year Filed)	<u> Yes </u>	<u> No </u>

I hereby claim the benefit under Title 35, United States Code, Section 119(e) of any United States provisional application(s) listed below

60/167,676
(Application Number)

November 29, 1999
(Filing Date)

I hereby claim benefit under Title 35, United States Code, Section 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, Section 112, I acknowledge the duty to disclose all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56 (copy attached) which became available between the filing date of the prior application and the national or PCT International filing date of this application:

Title 37, Code of Federal Regulations, Section 1.56
Duty to Disclose Information Material to Patentability

(a) A patent by its very nature is affected with a public interest. The public interest is best served, and the most effective patent examination occurs when, at the time an application is being examined, the Office is aware of and evaluates the teachings of all information material to patentability. Each individual associated with the filing and prosecution of a patent application has a duty of candor and good faith in dealing with the Office, which includes a duty to disclose to the Office all information known to that individual to be material to patentability as defined in this section. The duty to disclose information exists with respect to each pending claim until the claim is canceled or withdrawn from consideration, or the application becomes abandoned. Information material to the patentability of a claim that is canceled or withdrawn from consideration need not be submitted if the information is not material to the patentability of any claim remaining under consideration in the application. There is no duty to submit information which is not material to the patentability of any existing claim. The duty to disclose all information known to be material to patentability is deemed to be satisfied if all information known to be material to patentability of any claim issued in a patent was cited by the Office or submitted to the Office in the manner prescribed by §§ 1.97(b)-(d) and 1.98. However, no patent will be granted on an application in connection with which fraud on the Office was practiced or attempted or the duty of disclosure was violated through bad faith or intentional misconduct. The Office encourages applicants to carefully examine:

(1) Prior art cited in search reports of a foreign patent office in a counterpart application, and

(2) The closest information over which individuals associated with the filing or prosecution of a patent application believe any pending claim patentably defines, to make sure that any material information contained therein is disclosed to the Office.

(b) Under this section, information is material to patentability when it is not cumulative to information already of record or being made of record in the application, and

(1) It establishes, by itself or in combination with other information, a prima facie case of unpatentability of a claim;

(2) It refutes, or is inconsistent with, a position the applicant takes in:

(i) Opposing an argument of unpatentability relied on by the Office, or

(ii) Asserting an argument of patentability.

A prima facie case of unpatentability is established when the information compels a conclusion that a claim is unpatentable under the preponderance of evidence, burden-of-proof standard, giving each term in the claim its broadest reasonable construction consistent with the specification, and before any consideration is given to evidence which may be submitted in an attempt to establish a contrary conclusion of patentability.

(c) Individuals associated with the filing or prosecution of a patent application within the meaning of this section are:

(1) Each inventor named in the application;

(2) Each attorney or agent who prepares or prosecutes the application; and

(3) Every other person who is substantively involved in the preparation or prosecution of the application and who is associated with the inventor, with the assignee or with anyone to whom there is an obligation to assign the application.

(d) Individuals other than the attorney, agent or inventor may comply with this section by disclosing information to the attorney, agent, or inventor.

Docket No. 50277-456
(OID 1999-048-01)

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Application of :
:
Rafiul AHAD :
:
Serial No. : Group Art Unit:
:
Filed: : Examiner: Not yet assigned
:
For: PERSISTENT AGENTS

POWER OF ATTORNEY
AND REVOCATION OF PREVIOUS POWERS

Honorable Assistant Commissioner
for Patents
Washington, DC 20231

Sir:

Oracle Corporation, a Delaware corporation having a place of business at 500 Oracle Parkway, Box 659507, Redwood Shores, California 94065, certifies that to the best of its knowledge and belief it is the assignee or is entitled to ownership of the entire right, title, and interest in and to the above-referenced patent application by virtue of an Assignment filed concurrently herewith and represents that the undersigned is a representative authorized and empowered to sign on behalf of Oracle Corporation, which hereby revokes all powers of attorney previously given and appoints the following attorney(s) and/or agent(s): Stephen A. Becker, Reg. No. 26,527; John G. Bisbikis, Reg. No. 37,095; Kenneth L. Cage, Reg. No. 26,151; Stephen C. Carlson, Reg. No. 39,929; Jennifer C. Chen, Reg. No. 42,404; Thomas A. Corrado, Reg. No. 42,439; Paul Devinsky, Reg. No. 28,553; Laura A. Donnelly, Reg. No. 38,435; Margaret M. Duncan, Reg. No. 30,879; Brian E. Ferguson, Reg. No. 36,801; Michael F. Fogarty, Reg. No. 36,139; Wilhelm F. Gadiano, Reg. No. 37,136; Keith E. George, Reg. No. 34,111; John A. Hankins, Reg. No. 32,029; Eric J. Kraus, Reg. No. 36,190; Edward E. Kubasiewicz, Reg. No. 30,020; Jack Q. Lever, Reg. No. 28,149; Raphael V. Lupo, Reg. No. 28,363; Christine F. Martin, Reg. No. 39,762; Michael A. Messina, Reg. No. 33,424; Eugene J. Molinelli, Reg. No. 42,901; Dawn Palmer, Reg. No. Joseph H. Paquin, Jr., Reg. No. 31,647; Robert L. Price, Reg. No. 22,685; Gene Z. Rubinson, Reg. No. 33,351; Joy Ann G. Serauskas, Reg. No. 27,952; Michele M. Schafer, Reg. No. 34,717; Arthur J. Steiner, Reg. No. 26,106; David L. Stewart, Reg. No. 37,578; Leonid D. Thenor, Reg. No. 39,397; Keith J. Townsend, Reg. No. 40,358; Aaron Weisstuch, Reg. No. P41,557; Edward J. Wise, Reg. No. 34,523; Alexander V. Yampolsky, Reg. No. 36,324; and Robert W. Zelnick, Reg. No. 36,976, all of

MCDERMOTT, WILL & EMERY
600 13th Street, N.W.
Washington, DC 20005-3096

and


Sanjay Prasad, Reg. No. 36,247; Christopher J. Brokaw, Reg. No. P45,620; Roger Kennedy, Reg. No. 44,823; of ORACLE CORPORATION

with full power of substitution and revocation, to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith. Send all future correspondence to the attention of Stephen C. Carlson, Reg. No. 39,929, care of the above address and direct all telephone calls to the same at (202) 756-8637.

Assignee of Interest:

Oracle Corporation

Dated: 5/19/00

By: 

Name: Sanjay Prasad

Title: Chief Patent Counsel

Address of Assignee of Interest:

Oracle Corporation

500 Oracle Parkway - Box 659507

Redwood Shores, CA 94065

Respectfully submitted,

MCDERMOTT, WILL & EMERY

Dated: 5/24/00

By: 

Name: Stephen C. Carlson

Reg. No.: 39,929

600 13th Street, N.W.
Washington, D.C. 20005-3096
(202) 756-8000
Facsimile: (202) 756-8087